




## Boxcold COLD ROOM WITH DROP-IN UNIT; +2/+8 C

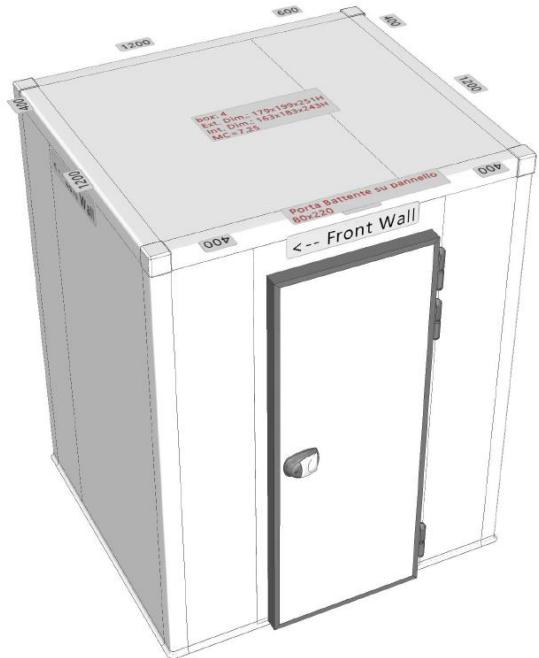

\* Attēls informatīvs

### ENG:

Standard panels have internal and external finish with white anti-scratch galvanized prepainted steel sheet. Insulation is 60 mm. Without floor. Vertical and horizontal edges have an internal and external anti-scratch white galvanized prepainted steel sheet finish. Door clear passage 800x1900H mm, a leaf with an aluminium perimeter profile, hinges in composite corrosion resistant material with height regulating, lockable door with internal safety push opening. Internal light. Drop-in cooler unit. Ceiling model. Refrigerant R452a. Volume 8,3 m3.

Temperature +2/+8 C.

### LAT:

Standarta paneļi - iekšējā un ārējā apdare ar tērauda loksniem ar cinkotu baltu pretskrāpējuma krāsojumu. Izolācija 60 mm. Bez grīdas. Vertikālajām un horizontālajām malām ir iekšēja un ārēja balta cinkota, tērauda loksne ar apdari pret skrāpējumiem. Durvis 800x1900H mm, labās puses vērtne ar alumīnija perimetra profiliu, eņģes no kompozītmateriāla, kas izturīgs pret koroziju ar augstuma regulēšanu; aizslēdzamas durvis, kas atveramas no iekšpuses. Iekšējā gaisma. Iebūvējams dzesētāja bloks, griestu modelis. Aukstumaģents R452a. Tilpums 8,3 m3.

Dimensijas 2550x1750x2150 / 2600 (h) mm. El. jauda 0,84kW; 230V/50/1N

Net svars: 384 kg